


Floor/Lift Truck/Pallet/Belt Scales

RoughDeck® SS

Stainless Steel Low-Profile Floor Scale

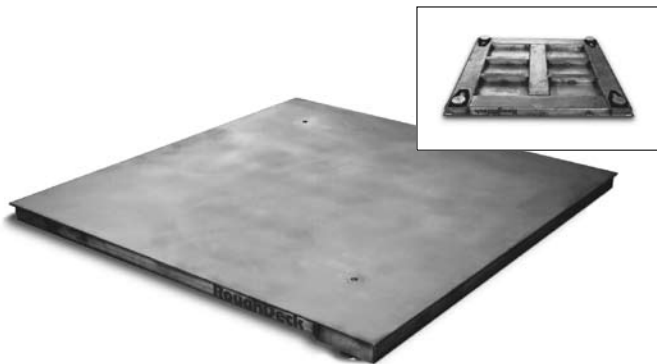

STANDARD FEATURES

- Rugged non-corrosive design
- 304 stainless steel construction
- Rigid stainless steel channel frame
- Four stainless steel NTEP Certified shear beam load cells
- 20ft of SURVIVOR® EL147HE hostile environment load cell cable
- TuffSeal® JB4SS stainless steel, NEMA 4x j-box with signal trim card
- Smooth stainless steel deck
- Four adjustable stainless steel SUREFOOT™ support feet
- Threaded eyebolt holes for easy lifting
- Five-year limited warranty



The load cells are recessed within the channel and protected on all sides. SUREFOOT supports provide a superior load introduction surface, reducing extraneous forces which might affect scale accuracy



Unique side-entry junction box provides easy access

APPROVALS



Measurement
Canada
Approved



SPECIFICATIONS

APPROVALS:

NTEP Certified, CC #92-001A9
Class III 5000d
Measurement Canada Approved
AM-4827
HCSS Series

END LOAD CAPACITY:

200% full scale at 1,000 lbs
100% full scale at 2,000 lbs and 5,000 lbs
80% full scale at 10,000 lbs

CABLE LENGTH:

20ft (6.1 m)
(for connecting j-box to indicator)

WARRANTY:

Five-year limited warranty

BASES

PART #	SIZE (W x L x H)	CAPACITY	EST. SHIP WEIGHT
18663†	2.5ft x 2.5ft x 3.5in	2,000lb (1,000kg)	173lb
46239†	3ft x 3ft x 3.5in	1,000lb (500kg)	232lb
18664†	3ft x 3ft x 3.5in	2,000lb (1,000kg)	232lb
46241	4ft x 4ft x 3.5in	1,000lb (500kg)	375lb
18665	4ft x 4ft x 3.5in	5,000lb (2,500kg)	375lb
18666	4ft x 4ft x 3.5in	10,000lb (5,000kg)	490lb
18667	4ft x 5ft x 3.5in	5,000lb (2,500kg)	437lb
18668	4ft x 5ft x 3.5in	10,000lb (5,000kg)	567lb
18671	5ft x 5ft x 3.5in	5,000lb (2,500kg)	541lb
18672	5ft x 5ft x 3.5in	10,000lb (5,000kg)	696lb
18676	5ft x 7ft x 3.5in	10,000lb (5,000kg)	929lb

† Not recommended for use with pallet jacks

Note: All capacities are Canada approved